

Clean the Mount by flushing away dirt with fresh water and/or wiping down the assemblies with a clean, damp cloth. If used in a salt water environment, flushing with fresh water and drying after use is recommended. If used extensively in a salt water environment, lightly lubricate stainless steel parts as needed. Vertical and horizontal adjustment and release mechanisms that are not kept free from debris may bind. Lubricate lightly as needed with a non-corrosive lubricant provided by your unit armorer.

## CARE AND MAINTENANCE

Rear ISO View



## PRODUCT IDENTIFICATION (CONT'D)

## WARRANTY STATEMENT

Based on the Magnuson-Moss Warranty Act, Wilcox Industries Corp. offers no express warranty on its product line. However, Wilcox Industries Corp. recognizes its obligation concerning implied warranty.

Wilcox Industries Corp. mounts will be serviced or replaced in accordance with the following schedule at no cost to the purchaser for defects in materials or workmanship. Shipment will be made via UPS ground prepaid to any continental United States destination.

NVG Filter Covers	90 Days
Mount Accessories and NVG Lanyards	One Year
Mounts (Unless otherwise specified)	Lifetime
Mounts with Electrical System	One Year

Wilcox Industries Corp. must be contacted to assign a **Return Merchandise Authorization (RMA) Number** prior to return shipment.

To expedite return, repair, and/or replacement of the mounts purchased under a military contract Wilcox Industries Corp. will accept any package at the address below, clearly marked:

**Wilcox Industries Corp.**  
**RMA # \_\_\_\_\_**  
**One Wilcox Way**  
**Newington, NH 03801**  
**603-431-1331**

Be sure to retain your packing list as proof of delivery date when making a warranty claim. If proof of delivery acceptance is not available, the warranty period shall start from the date of manufacture that is laser engraved on the mounts. Warranty is void if date of manufacture is defaced.

The mounts should be securely packaged, accompanied by a letter including sender's name, address, daytime phone number, date of purchase, date of manufacture, lot number and a description of the problem or work to be performed.

Manufactured by:



**Wilcox Industries, Corp.**  
**One Wilcox Way**  
**Newington, NH 03801-7816**

**Phone: 603-431-1331**  
**Fax: 603-431-1221**

[WWW.WILCOXIND.COM](http://WWW.WILCOXIND.COM)

Front ISO View



## PRODUCT IDENTIFICATION

## OPERATION AND MAINTENANCE INSTRUCTIONS FOR THE

**Wilcox L4 Skull Lock™ Head Mount-Lite**  
**for the Norotos AKA-2, Cadex 643-93C**  
**CAGE: 004F1**

**EAR Controlled ECCN 7E611.x: Commerce License**  
**may be required for export or re-export.**



**Wilcox L4 Skull Lock™ Head Mount-Lite**  
**(PNs 26000G05 (Small, Black), 26000G06 (Large, Black),**  
**26000G07 (Small, Tan), 26000G08 (Large, Tan),**  
**26000G09 (Small, Multi-Cam), 26000G10 (Large, Multi-Cam))**



© Wilcox Industries Corp. 2014-2017 All rights reserved. Printed in USA. Wilcox's Skull Lock™ Head Mount-Lite is Patent Pending. Wilcox® and the Wilcox "X" logo are registered trademarks of Wilcox Industries Corp. Modular by Design™ and Skull Lock™ are a trademarks of Wilcox Industries Corp. All other trademarks and registered trademarks in this manual are the property of their respective companies. Specifications and other data are subject to change without notice.

# CONFIGURATION

## STEP 1 - To Don the Head Mount-Lite:

### STEP 1A



PULL OUTWARD ON REAR ADJUSTMENT KNOB AND PULL TEMPLE STRAPS TO LOOSEN.

### STEP 1B



PULL OUTWARD ON STRAP LATCHES AND LOOSEN ALL HARNESSSES ON BOTH SIDES.

### STEP 1C



UNCLIP THE CHIN STRAP.

### STEP 1D



DON THE HEAD HARNESS, THEN ADJUST STRAPS AND SECURE STRAP LATCHES FOR A CUSTOM FIT.

### STEP 1E




PUSH INWARD ON REAR ADJUSTMENT KNOB AND ROTATE CW TO SECURE.

## STEP 2- Attach the NVG to the Head Mount-Lite:

1. SLIDE THE MOUNT RELEASE LEVER TO THE LEFT USING THE RIGHT THUMB TO UNLOCK THE MOUNT RELEASE.
2. INSERT THE TOP MOUNTING GUIDE.
3. ROTATE THE MOUNT DOWNWARD UNTIL IT SEATS.
4. SLIDE THE MOUNT RELEASE LEVER TO THE RIGHT USING THE RIGHT FOREFINGER TO SECURE.
5. PRESS THE MOUNT FIRMLY AT THE BASE TO SEAT, ALLOWING THE MOUNT TO ACHIEVE ITS POSITION.

### STEP 2A

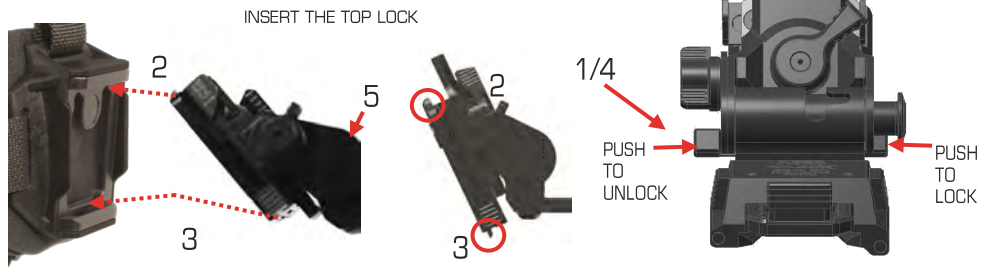

## STEP 3 - To Utilize the Weight Storage Basket

### STEP 3A



LIFT THE VELCRO FLAPS ON THE OUTSIDE OF THE STORAGE BASKET.

### STEP 3B



OPEN THE VELCRO SEALS ON THE INNER LININGS OF THE STORAGE BASKET. INSERT SAND BAG OR WEIGHT, THEN REAFFIX VELCRO SEALS.

### STEP 3C



REAFFIX THE VELCRO FLAPS ON THE OUTSIDE OF THE STORAGE BASKET.

## Accommodates a Variety of Mounting Configurations, Including:

### Wilcox G24 Mount



### Wilcox G29 Mount



### Norotos AKA-2 Mount



### Cadex 643-93C Mount

