


# INSTALLATION (CONTINUED)


## 4 FORE/AFT POSITIONING

Loosen both Thumb Knobs by rotating counterclockwise. Locate the desired fore/aft position and tighten both Thumb Knobs clockwise.



## 5 ADJUSTING THE FACE SHIELD

Release both Brake Locking Handles and adjust the face shield to desired position. Rotate the Brake Locking Handle to secure.

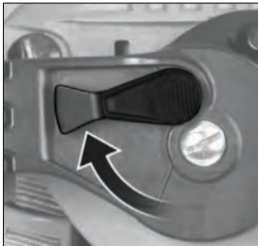

## CLEANING & CARE

- 1 Spot-clean with a mild detergent and water.
- 2 Visually check the entire face shield for signs of wear and breakage.
- 3 Clean dust and dirt by using air pressure.
- 4 Check that the mounting lock arms work properly.

**NOTE: IF ANY DEFECTS ARE FOUND, THE DAMAGED COMPONENTS SHOULD BE REPLACED BEFORE USE.**

[www.ops-core.com](http://www.ops-core.com)



## HANDGUN FACE SHIELD OPERATOR'S MANUAL

© OPS-CORE 2016 UM-1017 REV. A



**For FAST®, SENTRY, and ACH/TBH Style Helmets**  
Equipped with OPS-CORE FAST or ACH Accessory Rail Connectors (ARCs) Only.

# INTRODUCTION

## ABOUT YOUR HANDGUN FACE SHIELD:

This manual covers the installation and basic operating instructions for the Ops-Core Handgun Face Shield. The Handgun Face Shield is designed to fit Ops-Core FAST, MT, and Sentry helmets, and Gentex ACH/TBH helmets. The face shield features a new ARC mounting mechanism that allows for secure and stable attachment. When properly installed, the face shield transforms any helmet into the ultimate defense against multiple impacts from handgun threats.



## HANDGUN FACE SHIELD KIT INCLUDES:

(1) Handgun Face Shield




## FEATURES

- Locking mechanism secures face shield in any position, pivots quickly and smoothly
- Gasket reduces amount of liquids from entering between the helmet and face shield
- Fore/Aft adjustment helps accommodate protective mask, eye/sunglasses, goggles, and different facial geometry
- Down stop adjustment screw keeps face shield above shell edge in down position
- Folding arms for smaller storage footprint

# INSTALLATION

## 1 PREPARE THE FACE SHIELD

Rotate both Brake Locking Handles to the locked position and both Rail Mounting Handles to the open position.

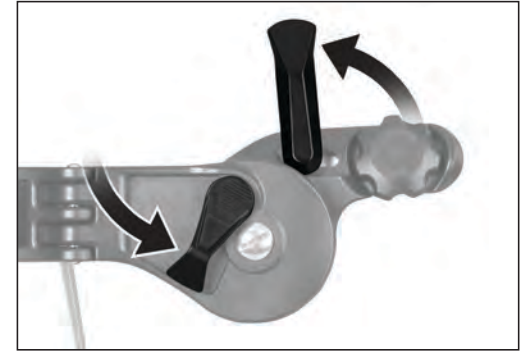

## 2 INSERT CONNECTOR SHOES

Align and insert both Accessory Rail Connector Shoes into the ARC Rails on your helmet until the T-Lock engages with the desired ARC Rail slot, using slot 2, 3, or 4 only. Be sure to align to the same slot on both sides.



## 3 FASTEN RAIL MOUNTING HANDLES

Fasten both Rail Mounting Handles to secure the face shield in place.

