


supporting your precision



ZC527 0.1MIL
DATASHEET

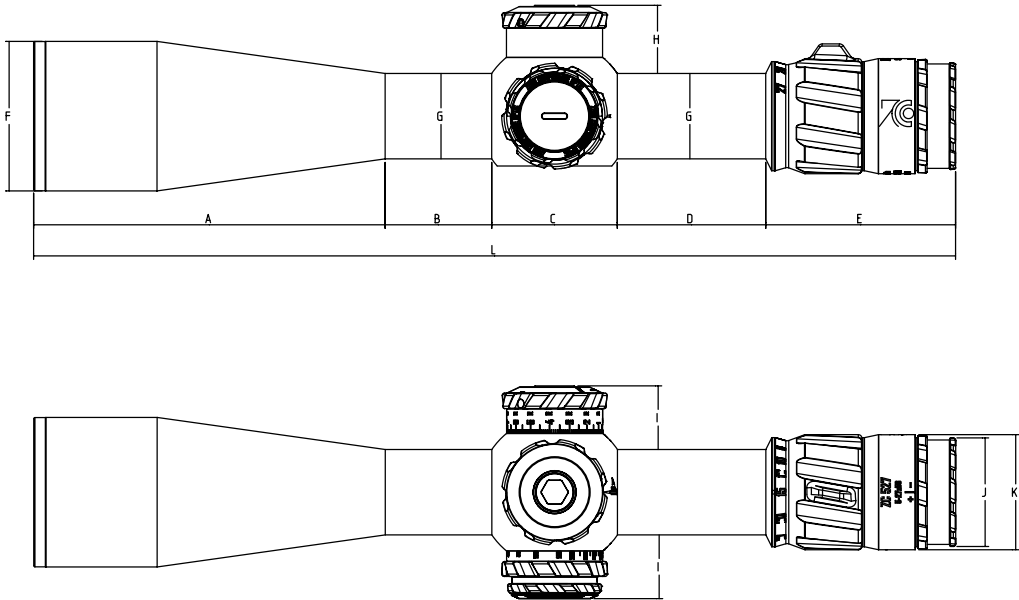

Abmaß	A	B	C	D	E	F	G	H	I	J	K	L
[mm]	148	45	53	62,5	79	63	36	28,7	27	45,75	48,5	387,5
[inch]	5.82	1.77	2.09	2.46	3.1	2.48	1.42	1.13	1.06	1.8	1.9	15.24

Magnification	5-27
Objective diameter (mm)	56
Exit pupil (mm)	10.47-2.1
Field of view max. / min. (m/100m)	7-1.5
Field of view (ft/100Yds.)	21'-4.5'
Parallax adjustment (m)	25-infinity
Eye relief (mm)	>90 mm
Lighttransmission (%)	92%
Reticle image plane	1.
Diopter adjustment (Dpt.)	-3 / 2
Main tube diameter (mm)	36 mm
Length (mm)	387 mm
Weight (g)	1122g
Elevation adjustment MRAD /100m	35
Windage adjustment MRAD /100m	20
Click value MRAD /100m	0.1
Turret rotation	CW/CCW
Filter thread Objective (mm)	M60x0.75
Impermeability	4 m water depth
Temperature Function (C°)	-25°/60°
Illuminated color	Red / Green
Locking Elevation / Windage	Elevation & Windage
AIM- automatic illumination management	Yes (after 2 mins or depending on position/ directionality; after 2 hours complete shutdown)
Power supply	CR2032

www.zcompoptic.com

2023 © Zero Compromise Optic GmbH | All rights reserved. No guarantee for correctness and accuracy of the information contained.

Headquater
Bäckerstraße 1
2433 Margarethen am Moos, Austria
+43 2230 20270-134
sales-international@zcompoptic.com

North America
9190 Lower Fords Creek Rd
Orofino, ID 83544
(208)-435-4000
sales@zcompoptic.com